



**FABRIC  
SCANNER**

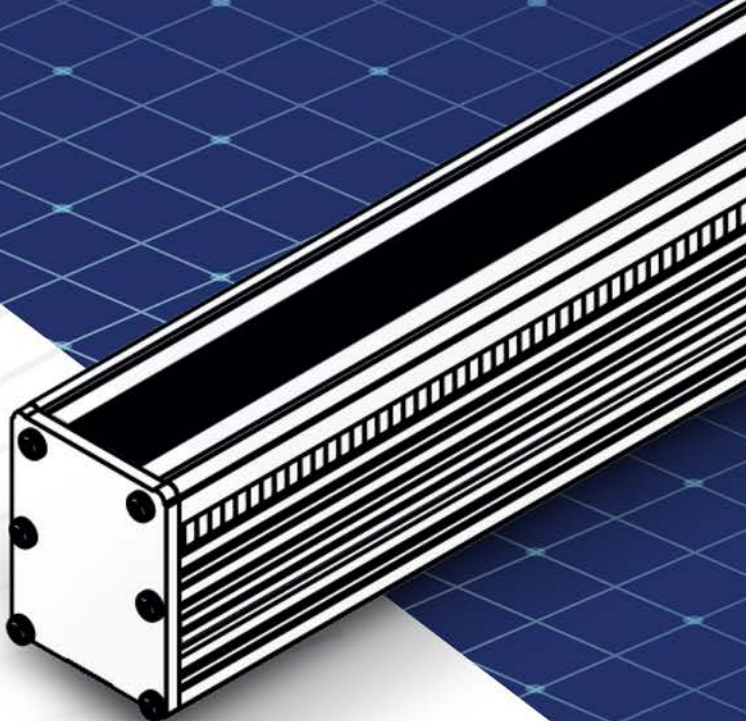

**AGTEKS**  
sensing

**Smart Quality Scanners**  
for Textile Industry 4.X

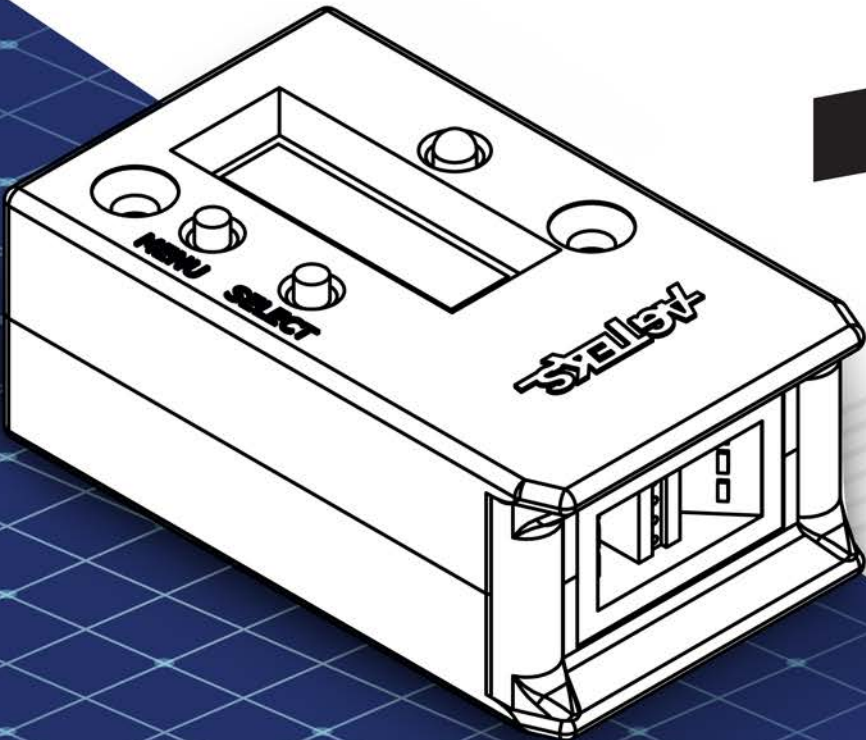

**YARN  
SCANNER**

# Quality Bar

## General Description

**Quality Bar** is a genuine high-resolution online fabric inspection system with multi-modes scanning processes and simultaneous front & back lighting with RGB+IR light sources.

**Quality Bar** may be installed on a weaving loom or on a fabric inspection machine or even on a fabric spreading machines to check any kind of woven or knitted fabrics.

**Quality Bar** detects and reports all quality issues such as fabric irregularity, lump, knot, hole, irregular edge, missing weft /wrap irregular weft or warp, weft slope, fabric pattern error etc. on the fabric. If needed it can even give the stop command to the loom while detection. Also, all of issues can be sent to the cloud or webservice etc. for Industry 4.X.




## Technology

**Quality Bar** is equipped with specially designed high-resolution scanning sensors supported by high level image processing algorithms to achieve highest precision and fastest online fabric inspection processes up to 100 m/min fabric speed\*

\* Scanning resolutions can be selected as 300 or 600 dpi.

\* Fabric speed depends on resolution specs.


## Some Examples of Fabric Defects

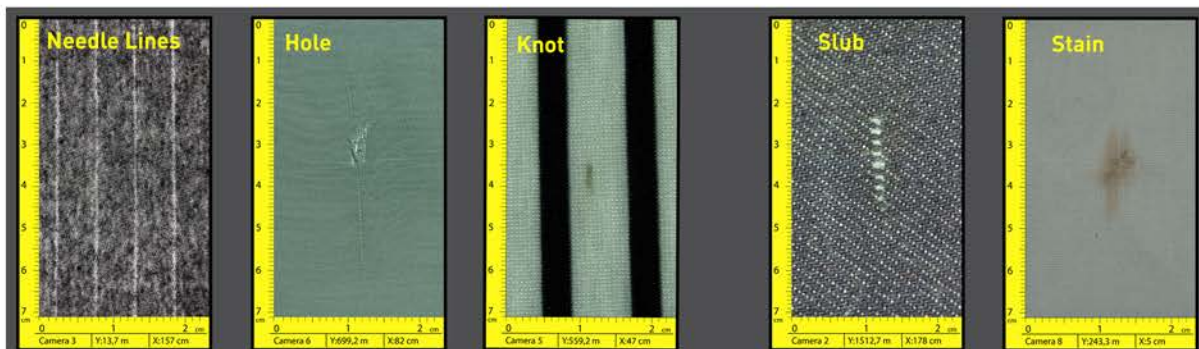


Back Lighting

Front Lighting

## | Simultaneous Front & Back Lighting |

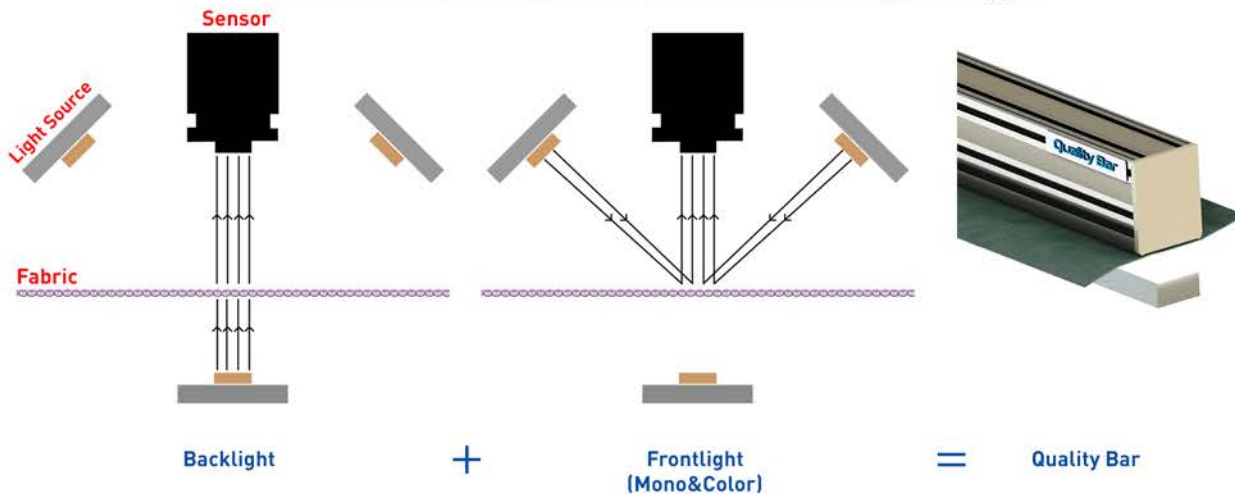

## | Features |

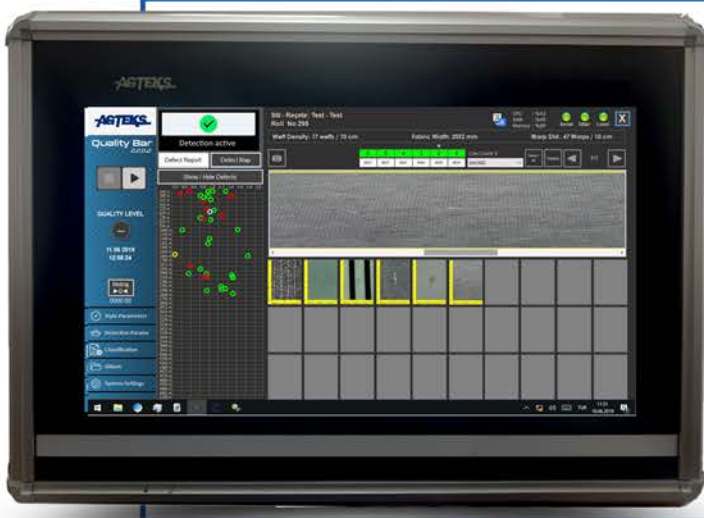

### Fabric Defects

- Fabric width
- Stain
- Fabric irregularity
- Fabric pattern defects

### Vertical Defects

- Missing warp
- Warp density
- Irregular warp
- Broken needles

### Horizontal Defects

- Irregular weft
- Irregular edge
- Weft slope
- Slub on the weft
- Missing / Incompleted weft

### Spot Defects

- Slub
- Corky
- Fluff
- Lump
- Knot
- Hole etc.

### General

- Online check
- Machine stopping feature
- Number of warp detection
- Defect Map

## | Technical Information |

Technology	High Speed Scanning Sensor	Fabric	Woven, non-woven or knitted fabrics
Sensor resolution	Up to 600 dpi	Output	NPN, open collector output, max 50mA
Scanning length	Up to 600 cm	Parameter Input	2 pcs. External Input
Depth of focus	0-3 mm	Program Control	Multi-core embedded computer control
Scanning speed	Up to 100 meter/min	Recording	Defect Time, Defect Position [X, Y] on the fabric, Machine Number, Defect Size, Defect Picture, Defect Name etc.
Sensing speed	6000 lps		
Faulty detection	Fabric defects, weft defects, warp defects		

International Patent Pending!


# Shade Bar

## General Description

**Shade Bar** is an online shading detection system with high-sensitive spectrophotometer with up to 6 modules for comparing up to 6 different areas longitudinally and horizontally on the fabric.

**Shade Bar** may be installed just after the dyeing processes and detects the shading issues such as color differences issues between left, middle and right side of the fabric, reports all of shading data for whole roll for analyzing.

**Shade Bar** needs L, a, b and  $\Delta E$  values of fabric and checks fabric shading every  $\text{cm}^*$ . If needed it can even give the stop command to the machine while detection. Also, all the scanned data can be sent to the cloud or webservice etc. for Industry 4.X.

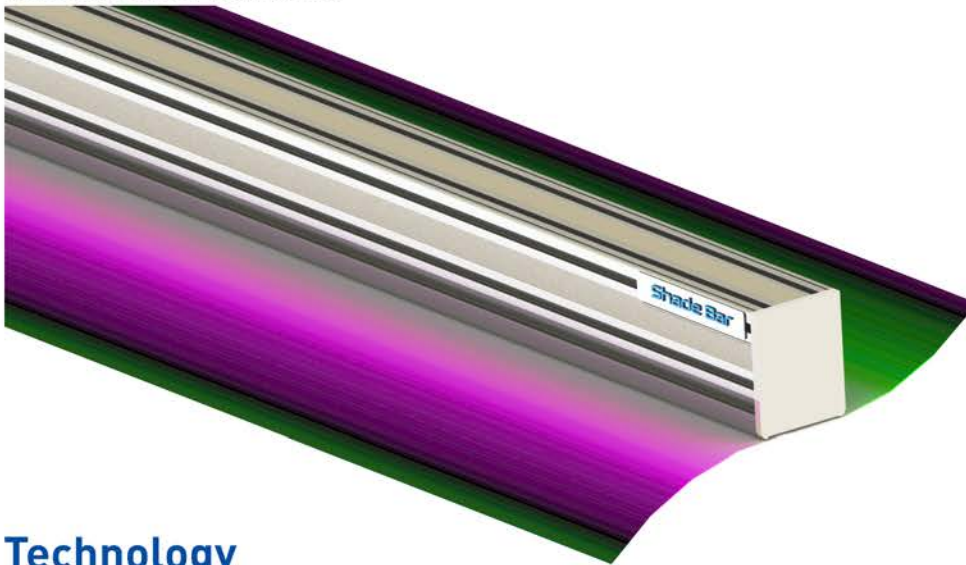


## Technology

**Shade Bar** uses specially designed high-sensitive spectrophotometer and high-power LEDs.

**Shade Bar** size can be up to 6 meters with up to 6 modules.

\*Y axis resolution depends on flowing speed.

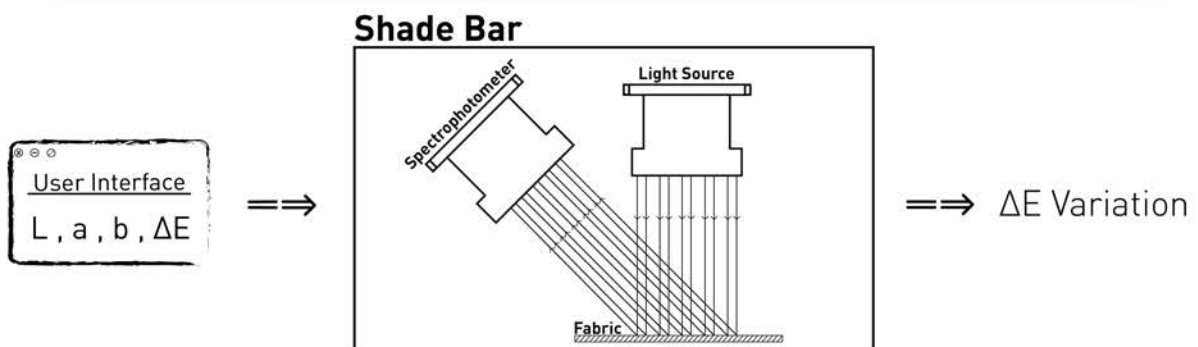

## Technical Information


Technology	High-Sensitive Spectrophotometer	Communication	Ethernet or Wi-Fi
Sensor resolution	Up to 10 nm + $\Delta E$ : Up to %0.1	Output	2 pcs. NPN, open collector, max 50mA
Scanning length	Up to 600 cm.	Recording	Defect Time, Defect Position (X, Y), Machine Number, Defect Size, Defect Name etc.
Sensing speed	100 lps		
Faulty detection	Shade detection		

International Patent Pending!

## General Description

**Digital Dropwire** that is a revolution of the mechanical dropwires is high resolution online optical dropwire system to sense the yarn breaks and defects on the wrapping, rebeaming, before-weaving looms\* for especially denim yarns or any kind of yarns.


**Digital Dropwire** detects the broken yarn and defects then can give the stop command to the loom immediately or report the all issues.

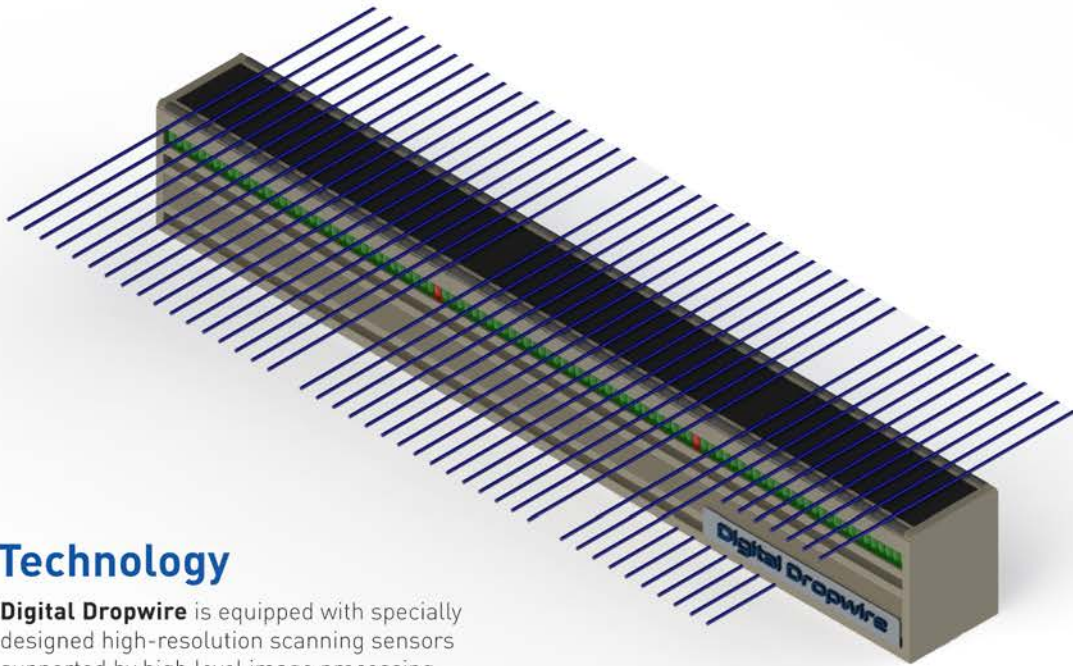

## Technology

**Digital Dropwire** is equipped with specially designed high-resolution scanning sensors supported by high level image processing algorithms and fastest online optical dropwire system up to 600 m/min.

\*Depends on warp density.

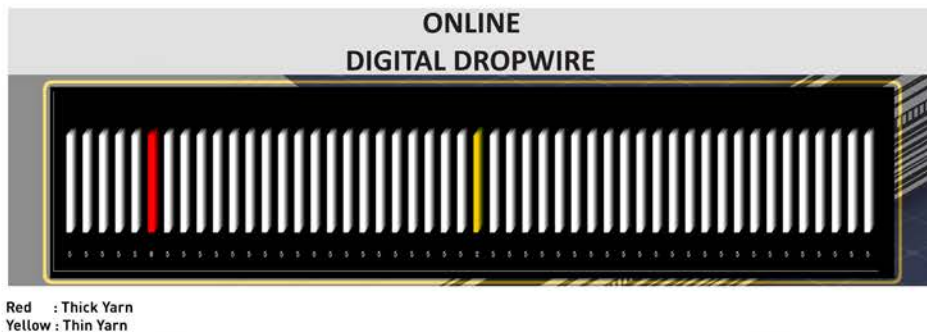

## Technical Information

Technology	High Speed Scanner Sensor	Communication	Ethernet or Wi-Fi
Sensor resolution	Up to 600 dpi	Output	2 pcs. NPN, open collector, max 50mA
Scanning length	Up to 600 cm	Recording	Defect Time, Defect Pos. (X, Y), Machine Number, Defect Size, Defect Pic., Defect Name etc. in defect detection mode.
Sensing speed	6000 lps		
Faulty detection	Yarn breaks, yarn defects		

International Patent Pending!

# Finishing Bar

## General Description

**Finishing Bar** is an online fabric inspection system for fabric finishing processes with mono & colored camera and front & back lighting.

**Finishing Bar** may be used on a dyeing, sizing, fixing, dipping etc. processes for any kind of fabrics.

**Finishing Bar** detects and reports all quality issues such as fabric irregularity, lump, knot, hole, irregular edge, irregular weft or warp, fabric pattern error etc. on the fabric. If needed it can even give the stop command to the loom while detection. Also, all of issues can be sent to the cloud or webservice etc. for Industry 4.X.




## Technology


**Finishing Bar** is equipped with high-resolution line scan cameras supported by high level image processing algorithms to fastest online fabric inspection system up to 450 m/min fabric speed\*.

\*Finishing Bar detects all quality issues every 100 um at 150 m/min.

## Some Examples of Fabric Defects

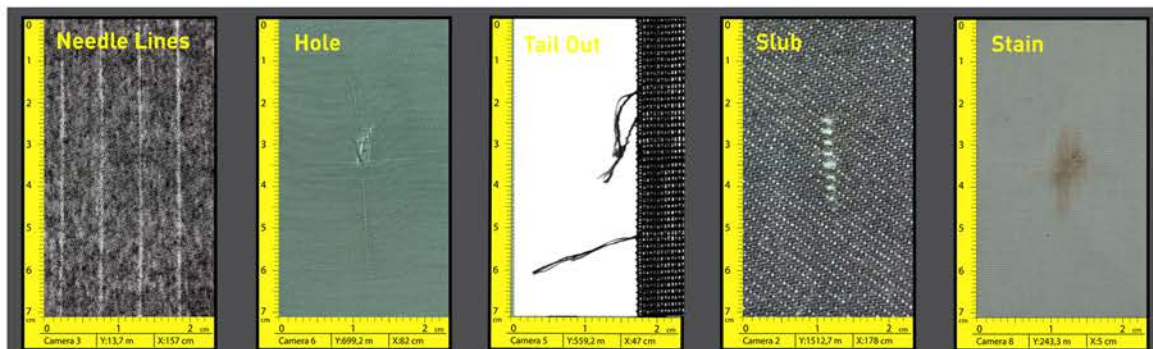

## | Simultaneous Front & Back Lighting |

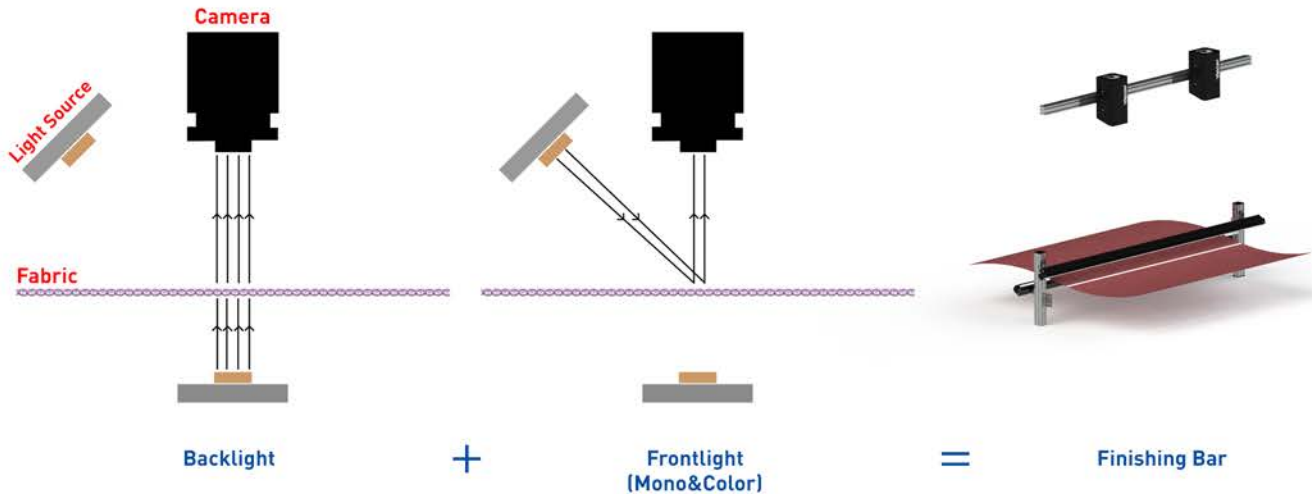

### Fabric Defects

- Fabric width
- Stain
- Fabric irregularity
- Fabric pattern defects

### Vertical Defects

- Missing warp
- Warp density
- Irregular warp
- Broken needles

### Horizontal Defects

- Irregular weft
- Irregular edge
- Weft slope
- Slub on the weft
- Missing / Incompleted weft

### Spot Defects

- Accumulation
- Fluff
- Lump
- Knot
- Hole
- Water or grease stain etc.

### General

- Online check
- Machine stopping feature
- Number of warp detection
- Defect map

## | Technical Information |

Technology	High Speed Line Scan Camera	Fabrics	Woven, non-woven or knitted fabric
Camera resolution	Up to 8K	Output	2 pcs. NPN, open collector, max 50mA
Scanning length	Up to 600 cm	Parameter Input	2 pcs. External Input
Sense res. at speed	Up to 450 meter/min	Program Control	Multi-core computer control
Sensing speed	26.000 lps	Indication	Graphic view on PC
Faulty detection	Fabric defects, weft defects, warp defects	Recording	Defect Time, Defect Position [X, Y] on the fabric, Machine Number, Defect Size, Defect Picture, Defect Name etc.
Communication	Ethernet or Wi-Fi		

International Patent Pending!

# HS-Quality Eye 1D/2D

## General Description


**HS-Quality Eye 1D** is a solid state one-dimensional online yarn quality sensor with optical scanning technology specially to sense slub and dtex/denier value for fibers & yarns up to 6000 m/min.

**HS-Quality Eye 2D** is a solid state two-dimensional online yarn quality sensor with optical scanning technology specially to sense slub and high-accuracy dtex/denier value for fibers & yarns processes up to 6000 m/min.


**HS-Quality Eye 1D/2D** detects and reports all quality issues such as yarn break, high- accuracy dtex/denier value and variation, slub, splice recognition and measures pollution, thickness and length. It has four outputs to send informatin to the machine or PLC etc. for defects. Also, all of issues can send to the cloud or webservice etc. for Industry 4.X.

## Technology

**HS-Quality Eye** uses specially designed high-resolution scanning sensors and back lights for yarns in all kind of color. Scanning speed can be up to 60.000 lines per second with 400 dpi resolution, 8 mm scanning area.

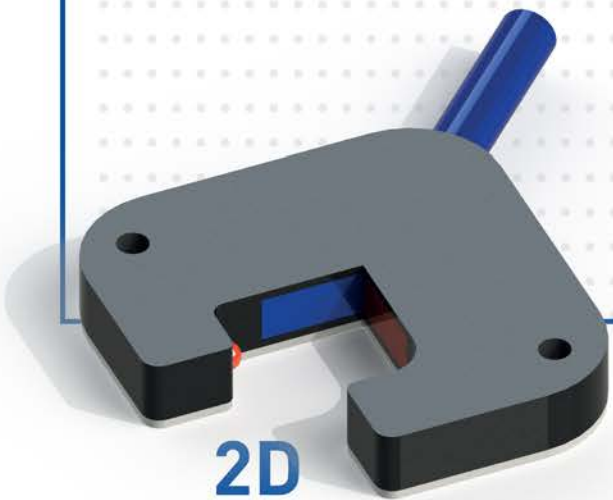



2D

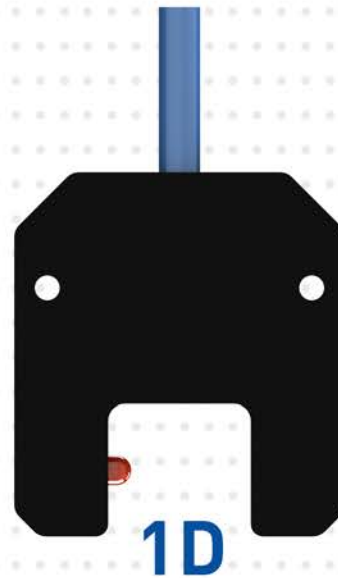

1D

**HS-Quality Eye** has two colored light source and spectrum filter as blue and red on each axis.


## Some Examples of Yarn Defects



Slub



Dtex Lower

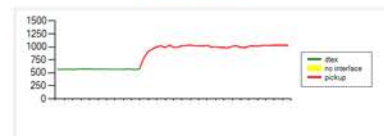

Dtex Higher


Dtex/Denier Value



## | Comparison |

	X Sensor	HS-Quality Eye 1D	HS-Quality Eye 2D
Sensor Type	Photo diode	Linear Image Array	Linear Image Array
Pixel Count	1	128	2 x 128
Resolution	-	400 dpi	2 x 400 dpi
Axis	No axis	1 axis	2 axis
Dtex Value	-	Absolute Value	High-Accuracy Absolute Value
Signal from sensor	Only Relative Change	Absolute Thickness	Absolute Thickness
Pollution Level	No	Yes	Yes
Yarn Speed	2500 m/min	6000 m/min	6000 m/min

## | Dtex Calculation |

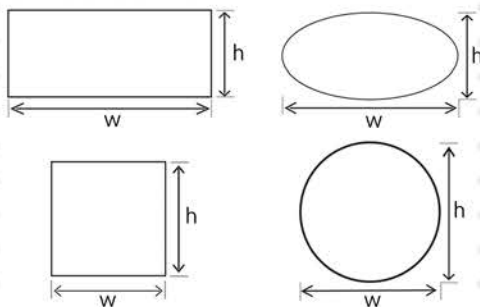


$$\text{Area} = h \times w \times \text{shape constant}$$

HS-Quality Eye calculates the dtex value as below using areas on X and Y axis of yarn.

$$\text{Area} = \int f(x)dx \times \int f(y)dy$$

## | Analog Signal |

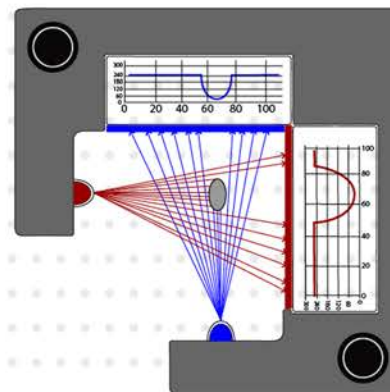

HS-Quality Eye shows analog signal for each axis.

## | Technical Information |

Technology	High Speed Scanning Sensor	Communication	Ethernet or Wi-Fi
Sensor resolution	400 dpi	Output	4 pcs. NPN, open collector, max 50mA
Scanning length	8 mm	Program Control	Multi-core embedded computer control
Sensing speed	60000 lps	Dimensions	1D: 40x44x8 mm / 2D: 45x45x8
Faulty detection	Thickness, thinness, dtex variation, slub, yarn break	Recording	Data-time, faulty length(time based), machine number,error code,thickness, meter,total fault number to server PC

International Patent Pending!

# Quality Eye

Up To  
100 m/min

COLOR  
MODE  
SCANNING



## General Description

**Quality Eye** is a solid-state online yarn quality sensor with optical scanning technology for twisting or winding processes with wide range of any kind of yarns up to 100 m/min\*.

**Quality Eye** detects and reports all quality issues such as yarn break, dtex variation\*\*, slub, corky screw\*\*, splice recognition and measures the length, thickness, thinness, hairiness and tension of the yarn. If needed it can even give the stop command to the machine while detection. Also, all of issues can be implemented for the cloud or webservice etc. for Industry 4.X.

## Technology


**Quality Eye** uses specially designed high-resolution scanning sensors and infrared lights for yarns in all kind of color. Scanning speed can be up to 1.000 lines per second with 600 dpi resolution and 8 mm scanning area.

\*Quality Eye detects all quality issues every 1 mm at 60 m/min.


\*\*Depends on type of yarns.

## Some Exmples of Pattern Recognition


Regular yarn

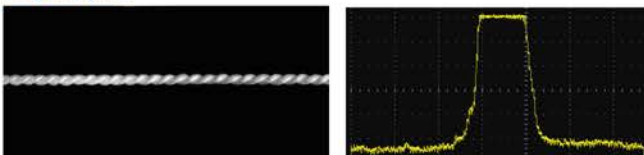


Branched Yarn

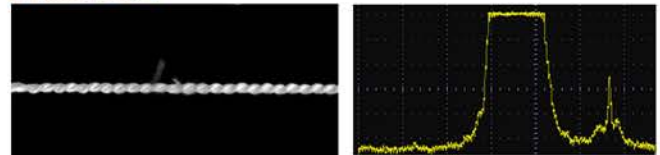

Yarn with slub/knot or thick yarn

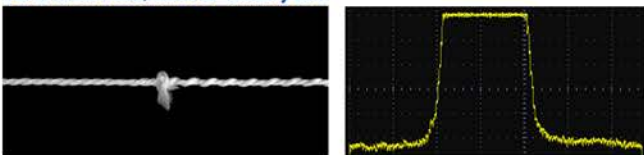

Thin yarn

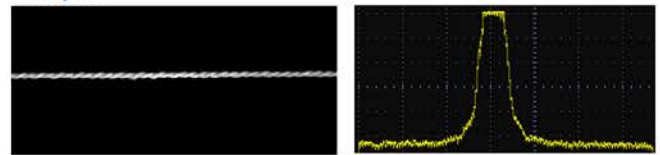

Spliced yarn



Corkscrew yarn



## | Measurements |

**Quality Eye** learns the yarn thickness during the first a few seconds after machine starting. Then starts to measure the percentages of relative changes on thickness, hairiness etc.



**Measures**

- Length
- Tension
- Thickness
- Hairiness

**Detects**

- Yarn Break
- Dtex Variation
- Slub
- Corky Skrew
- Splice Recognition

**Resolution**

- 1000 lines per second.
- 42 um resolution at X axis
- 1 mm sensing at 60 m/min.

**Action**

- Online records the all yarn quality issues with date and time.
- Stops the machine when detects the defects, yarn break or maximum meter count.

## | Technical Information |

Technology	High-Resolution Scanning Sensor	Communication	CANBUS + Ethernet
Sensor resolution	600 dpi	Display	OLED display
Scanning length	8 mm	Output	NPN, open collector output, max 50mA
Scanning speed	1 mm sensing at 60 meter/min	Parameter Input	Touch panel screen parameter input
Sensing speed	1000 lps	Program Control	Microprocessor control
Indication	Bi-color indication LED	Dimensions	54x32x21 mm
Faulty detection	Thickness, thinness, dtex variation slub, corky screw,yarn break,hairiness tension.	Recording	Data-time, faulty lenght, machine number, pindle number, meter, error thickness, milisecond.

International Patent Pending!

Scan me



• [www.agteks.com](http://www.agteks.com)

## AGTEKS LTD.

BOSB. Bakircilar San. Sit. Orkide Cd. 5/7  
Beylikduzu / Istanbul TURKEY

**Phone:** +90 212 501 22 26

**Fax :** +90 212 612 70 98

• [info@agteks.com](mailto:info@agteks.com)