


DC88

DOUBLE CYLINDER

DC88 E133HX - DC88 E143HX - DC88 E153HX

DOUBLE CYLINDER

DC88 E133HX - DC88 E143HX - DC88 E153HX

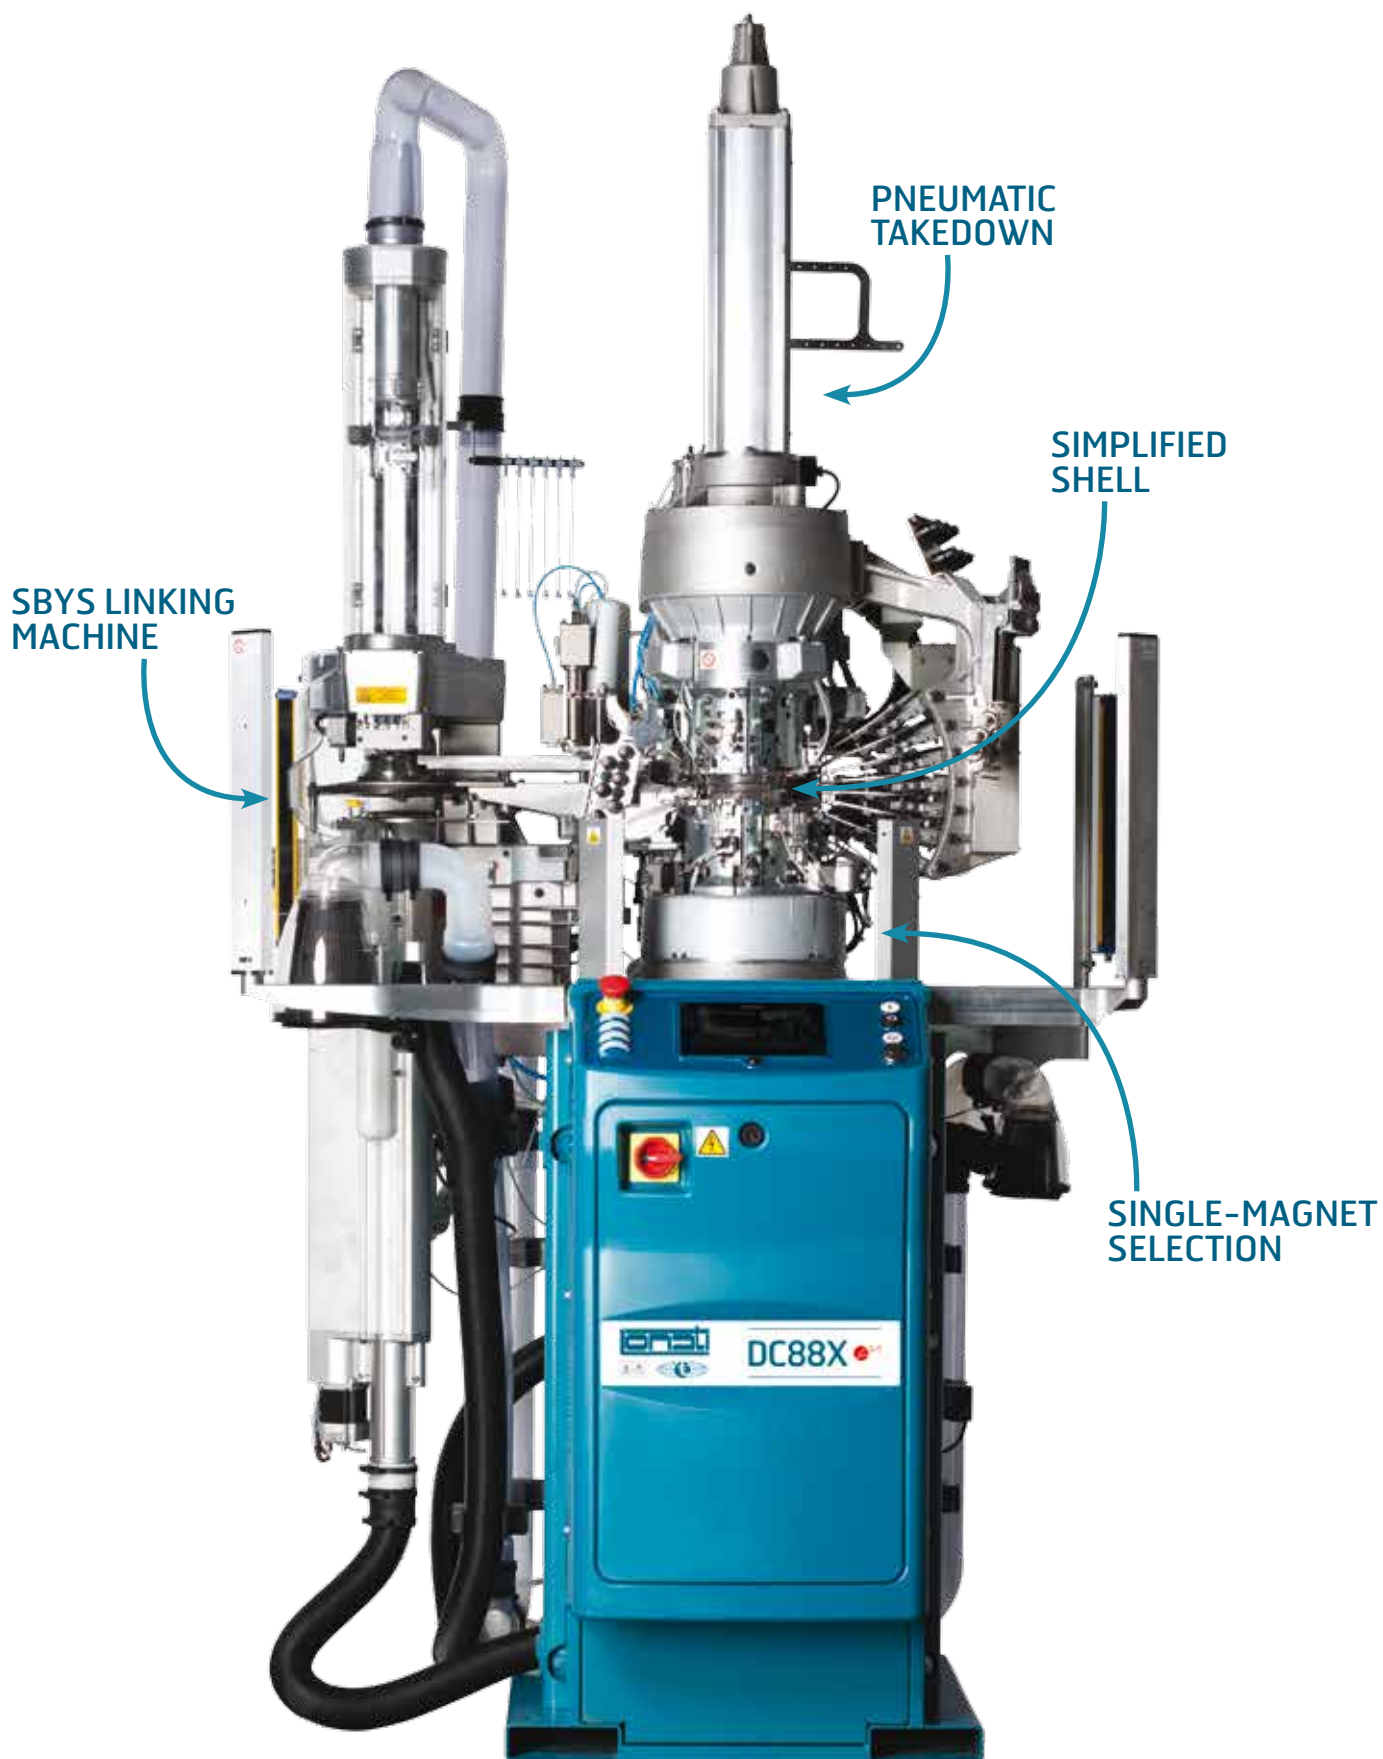



All images in this brochure are indicative and not binding.

DOUBLE CYLINDER

DC88 E133HX - DC88 E143HX - DC88 E153HX

Double cylinder 2 feeds machine for the production of men's, women's and children's socks in ribs, plain knit, links and links jacquard. Tuck knitting option on first feed of lower cylinder. Brushless motor incorporated in the column with variable heel and toe reciprocating motion. 2 selection points instead of pickers and needle droppers. Electronic size control by automatic adjustment of the stitch. Available in 3" 1/2, 3" 3/4 and 4" diameters and gauge from 7 to 22. SbyS linking machine with different needle thickness according to machine gauge.

- Needle-needle single-magnet selection instead of pickers and needle droppers and links drums for different rib and links patterns.
- Simplified shell/skirt with less mobile cams used only in the closed toe procedure
- Takedown with electronic control and size self adjustment
- Stitch cams with independent stepper motors
- Easier sinkers maintenance thanks to the rotating knitting head
- Toe linking performed by SbyS linking machine

DIMENSIONS



Length cm 116 + yarn creel cm 6
Depth cm 104 + yarn creel cm 69
Height cm 226 + yarn creel cm 34

WEIGHT



Machine ca. 460 Kg
Yarn creel ca. 30 Kg

CERTIFICATION



Green
Label

DOUBLE CYLINDER

DC88 E133HX - DC88 E143HX - DC88 E153HX

TECHNICAL FEATURES

MODEL	CYLINDER DIAMETER	GAUGE	NEEDLE THICKNESS
DC88 - E133HX	3"1/2	da 9 a 22	0.5 - 0.6 - 0.7 mm
DC88 - E143HX	3"3/4	da 9 a 22	0.5 - 0.6 - 0.7 mm
DC88 - E153HX	4"	da 7 a 22	0.5 - 0.6 - 0.7 - 0.9 mm

Above data are indicative and not binding.

STANDARD DEVICES

- Needle-needle single-magnet electronic selection system;
- Sock downtake with downwards movement control;
- Automatic turning device;
- Multi-stiffening by means of stepper motor;
- High heel by means of single-magnetic selection;
- Sinker cap with internal lubrication;
- 6 pneumatic yarnfingers;
- 4-rod take-up device;
- Suction valve controlled with stepper motor;
- Tail knitting at the start of the sock;

OPTIONAL DEVICES

- Fan
- Picot welt
- Size electronic control
- Split device
- Pneumatic yarnfinger number 7
- First yarnfinger positioning at feeds 5,6 and 7
- Second yarnfinger positioning at feeds 2,3 and 4
- Lycra plating
- Bare Lycra
- 6-rod take-up device
- Yarn brake discs opener 1 and 2
- Prearrangement for YoYo feeder
- Prearrangement for LGL feeder
- Spyder sensors
- Cassefils mechanical sensors
- Knots electric sensors
- Ethernet board
- Air Booster prearrangement

SUITABLE YARNS

The machine is designed to be used with the following yarns:

- Natural fibers
- Syntetic yarn
- Elastic yarn

POSSIBLE KNITTING

The standard machine can perform the following knittings

- Plain knit
- Rib
- Links
- Links Jacquard
- Tuck stitch on first feed on lower cylinder
- Patterned shadow stripe knit
- Open-work

NUMBER OF COLORS

Number of colors

In jacquard 2 colors on the same course
Up to 6 colors on first feed
Up to 3 colors on second feed

PERFORMANCES

		4" CYLINDER DIAMETER
GAUGE		14 (spessore ago 0,7mm)
		LINKS = 320 Rpm
KNITTING FEATURES		Costa e maglia liscia = 360 Rpm
		Moto alternato = 340 Rpm
		Punto trattenuto = 260 Rpm
		Moto alternato con punti flottati = 260
		Jacquard = 260 Rpm

Above data are indicative and not binding.

GAUGE

		GAUGE																
Model	ø	6	7	8	9	10	11	12	13	14	15	16	17	18	20	22		
133HX	3 1/2"				96	108	116	128	140	152	160	172	184	196	216	240		
					100	112	120	132	144	156	164	176	188	200	220	224		
					104		124	136	148			168	180	192				
					Needle thickness 0.7								Needle thickness 0.6				Needle thickness 0.5	

		GAUGE																
Model	ø	6	7	8	9	10	11	12	13	14	15	16	17	18	20	22		
143HX	3 3/4"				104	112	124	136	148	160	172	184	196	208	232			
					108	116	128	140	152	164	176	188	200	216	236	240		
							132	144	156	168	180	192	204	216				
					Needle thickness 0.7								Needle thickness 0.6				Needle thickness 0.5	

		GAUGE																
Model	ø	6	7	8	9	10	11	12	13	14	15	16	17	18	20	22		
153HX	4"				108	120	132	148	160	172	184	196	208	220	248			
					112	124	136	152	164	176	188	200	212	224	252			
					116	128	140	156	168	180	192	204	216	228	232	256		
					Needle thickness 0.7								Needle thickness 0.6				Needle thickness 0.5	

Above data are indicative and not binding.

DISCLAIMER:

For gauges lower or higher than those in the chart, their maximum speed must be reduced by 10-15%. Should you use staple fiber, maximum speed has to be detected each time according to the yarn and the item to be produced. For jacquard and Links jacquard, maximum speed has to be detected each time according to the pattern.



LONATI SPA

Via Francesco Lonati, 3 | 25124 Brescia (Italy)
Tel. +39 030 23901 | Fax +39 030 2310024
C.F.: 01469680175 | P.iva: 02096730961
info@lonati.com - www.lonati.com