


WOMEN'S WOMEN'S SINGLE CYLINDER LB4TS

WOMEN'S SINGLE CYLINDER LB4TS

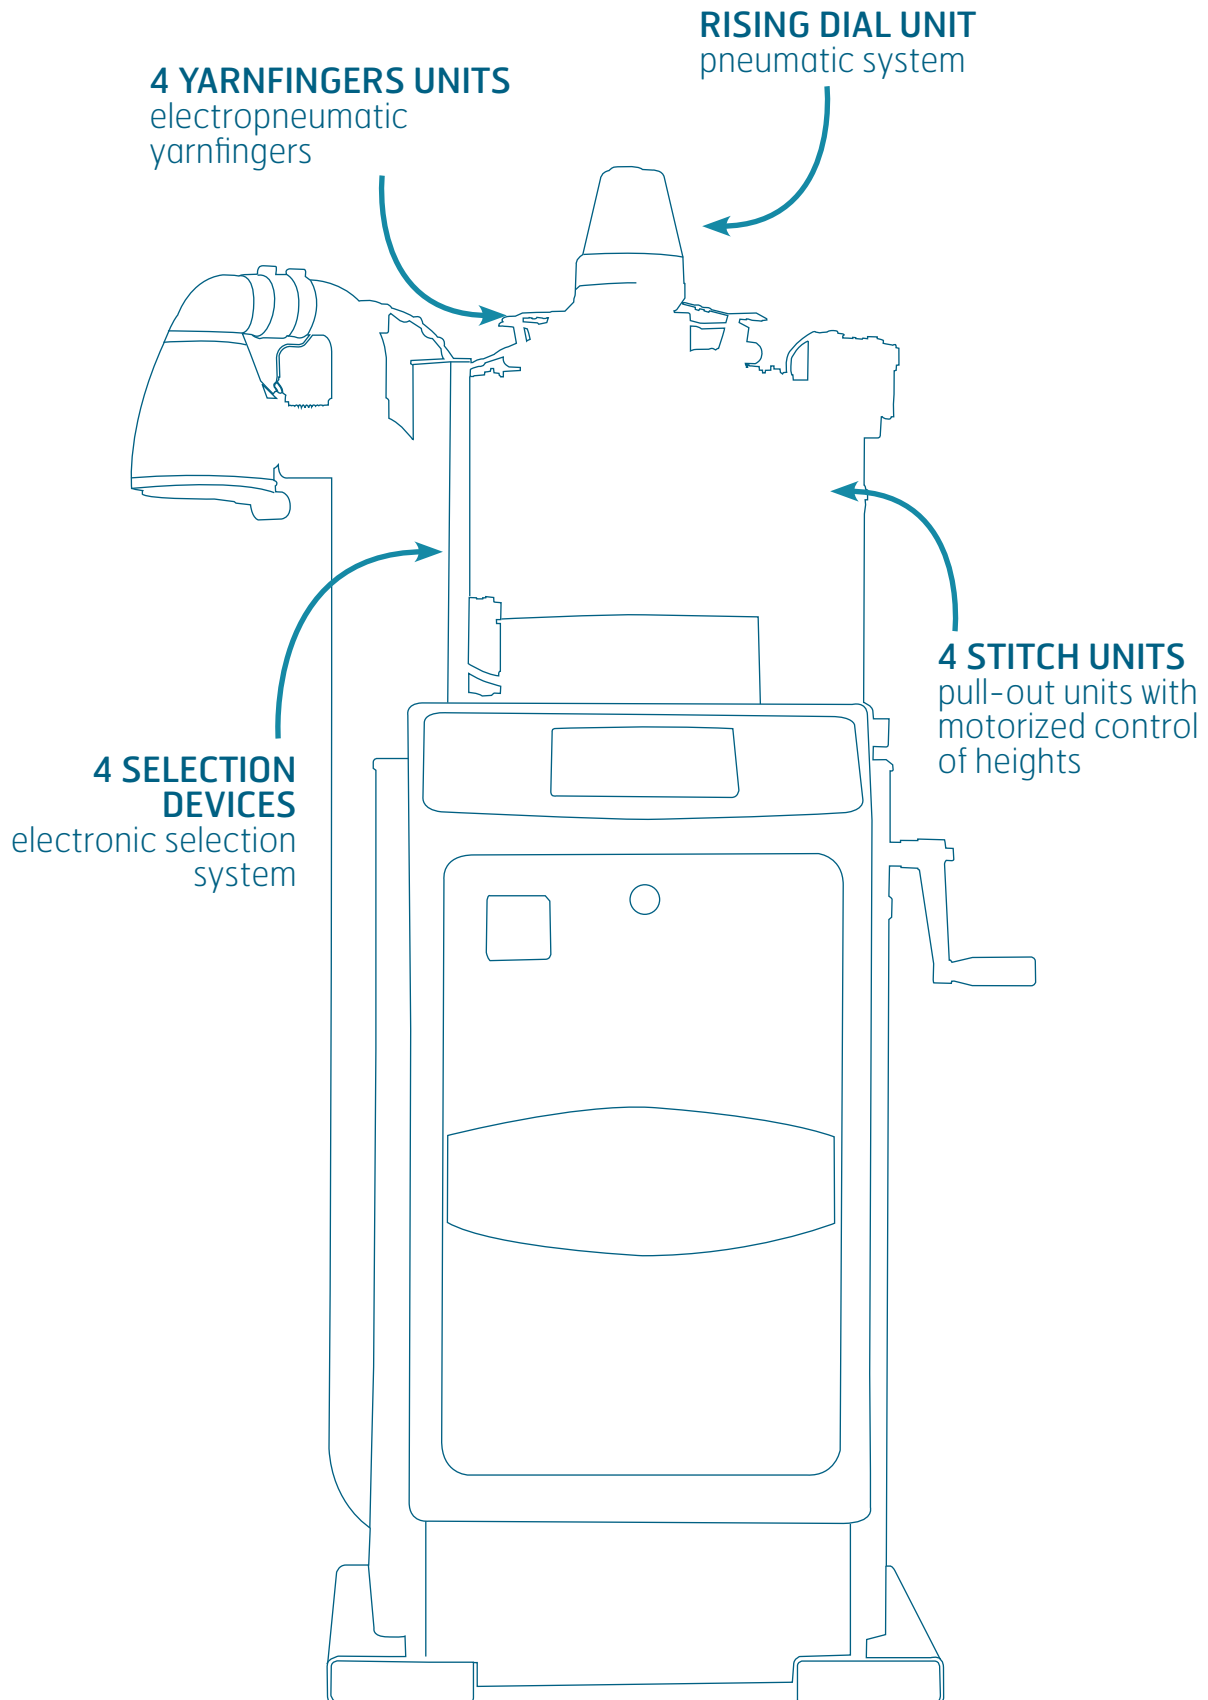

WOMEN'S SINGLE CYLINDER LB4TS

Electropneumatic single cylinder, 4 feeds machine for pantyhose and leggings in plain knit and/or terry and/or natural fibers, 1x1 and 3x1 fixed mesh on 4 feeds, covered lycra plating, 4 feeds plating, size marks and pneumatic selection on all feeds. Single or double dial jacks. Electronic device to maintain size at any temperature on the machine.

- 4 feeds single cylinder machine
- 6 pliers suction unit
- 24 yarnfingers
- Motorized sinkers cap, 2 motors
- 4 pneumatic stitch cams
- 4 pneumatic selection units on feeds 1-2-3-4 for mesh

DIMENSIONS



Length 60 cm + yarn creel cm 130
Depth 60 cm + yarn creel cm 130
Height 136 cm + yarn creel 250 cm

WEIGHT



Machine 225 kg
Yarn creel 28 kg

CERTIFICATION



Green
Label

WOMEN'S SINGLE CYLINDER LB4TS

TECHNICAL FEATURES

MODEL	CYLINDER DIAMETER	GAUGE	NEEDLE THICKNESS
LB4TS (Needle latch 7 mm)	4"	24	0.41 mm

Above data are indicative and not binding.

STANDARD DEVICES

- 42 reels "cotton" yarn creel;
- Sock ejection hood;
- Yarn waste filter;
- Stepper motor controlled suction valve;
- Rotary or fixed antitwist device;
- 8 yarn sliding sensors;
- Mechanical laid-in device on feeds 1 and 3;
- Pneumatic radial movement of plating yarnfinger;

OPTIONAL DEVICES

- DREAM or DREAM ONE device for stretching socks in ejection
- 2,2 Kw suction fan
- Production data collecting system: DCN ethernet
- Dinema YoYo yarn feeder, 12 max
- Dinema Plus medical or bare elastomer yarn feeders, 4 max
- Yarn sensors, 24 max
- 4 motorized stitch cams
- Motorized radial movement of plating yarnfinger
- LGL unwind yarn device kit - 8 max

SUITABLE YARNS

The machine is designed to be used with the following yarns:

- Cotton
- Wool
- Natural fibers yarn
- Elastomers (bare, single or double cover)
- Filanca
- Nylon

POSSIBLE KNITTINGS

The standard machine can perform the following knittings

- Terry
- Plain knit
- 1:1, 3:1, 5:1, 7:1, 1:3 fixed mesh
- 1:1 on vertical bands for cutting
- Supp-hose on 2 or 4 feeds
- Plating on plain knit on 2 or 4 feeds

PERFORMANCES

	4" CYLINDER DIAMETER
GAUGE	from 10 to 32
KNITTING FEATURES	450 rpm maximum in terry
MAXIMUM SPEED	500 RPM

Above data are indicative and not binding.

DISCLAIMER:

speed may need to be adjusted according to the inclination of the stitch cams, to the mechanical parts in use and to the yarn.
N.B. All data in the brochure are for information only and subject to change without any prior notice from Lonati SpA.

ALLOWED PERFORMANCES

CHART OF MAXIMUM ALLOWED SPEED IN PLAIN KNIT IN RELATION TO THE INCLINATION TO THE STITCH CAMS	
Stitch cam inclination	Maximum allowed speed in plain knit
58°	450

AVAILABLE CYLINDERS	
GG75-0,34	400
GG70-0,41	300 - 336 - 352
GG54-0,50	288
GG48-0,60	240
GG36-0,70	128 - 176

Above data are indicative and not binding.

DISCLAIMER:

All data related to maximum allowed mechanical speed may require to be reduced (to be adjusted according to functional tests on the machine) when using specific particular yarns and/or knitting features.



LONATI SPA

Via Francesco Lonati, 3 | 25124 Brescia (Italy)
Tel. +39 030 23901 | Fax +39 030 2310024
C.F.: 01469680175 | P.iva: 02096730961
info@lonati.com - www.lonati.com