

GOAL
SINGLE CYLINDER
GK725H - GK625H - GK525H

SINGLE CYLINDER


GK725H - GK625H - GK525H


SBYS DEVICE
for automatic
linking

KNITTING HEAD
designed to knit high quality
items and ensure constant
reliability over time.

**NEW
ELECTRONICS**
with high
resolution
touch screen
display

NEW BASE
designed to increase
solidity and rigidity,
allows a more
ergonomic assembling
of components

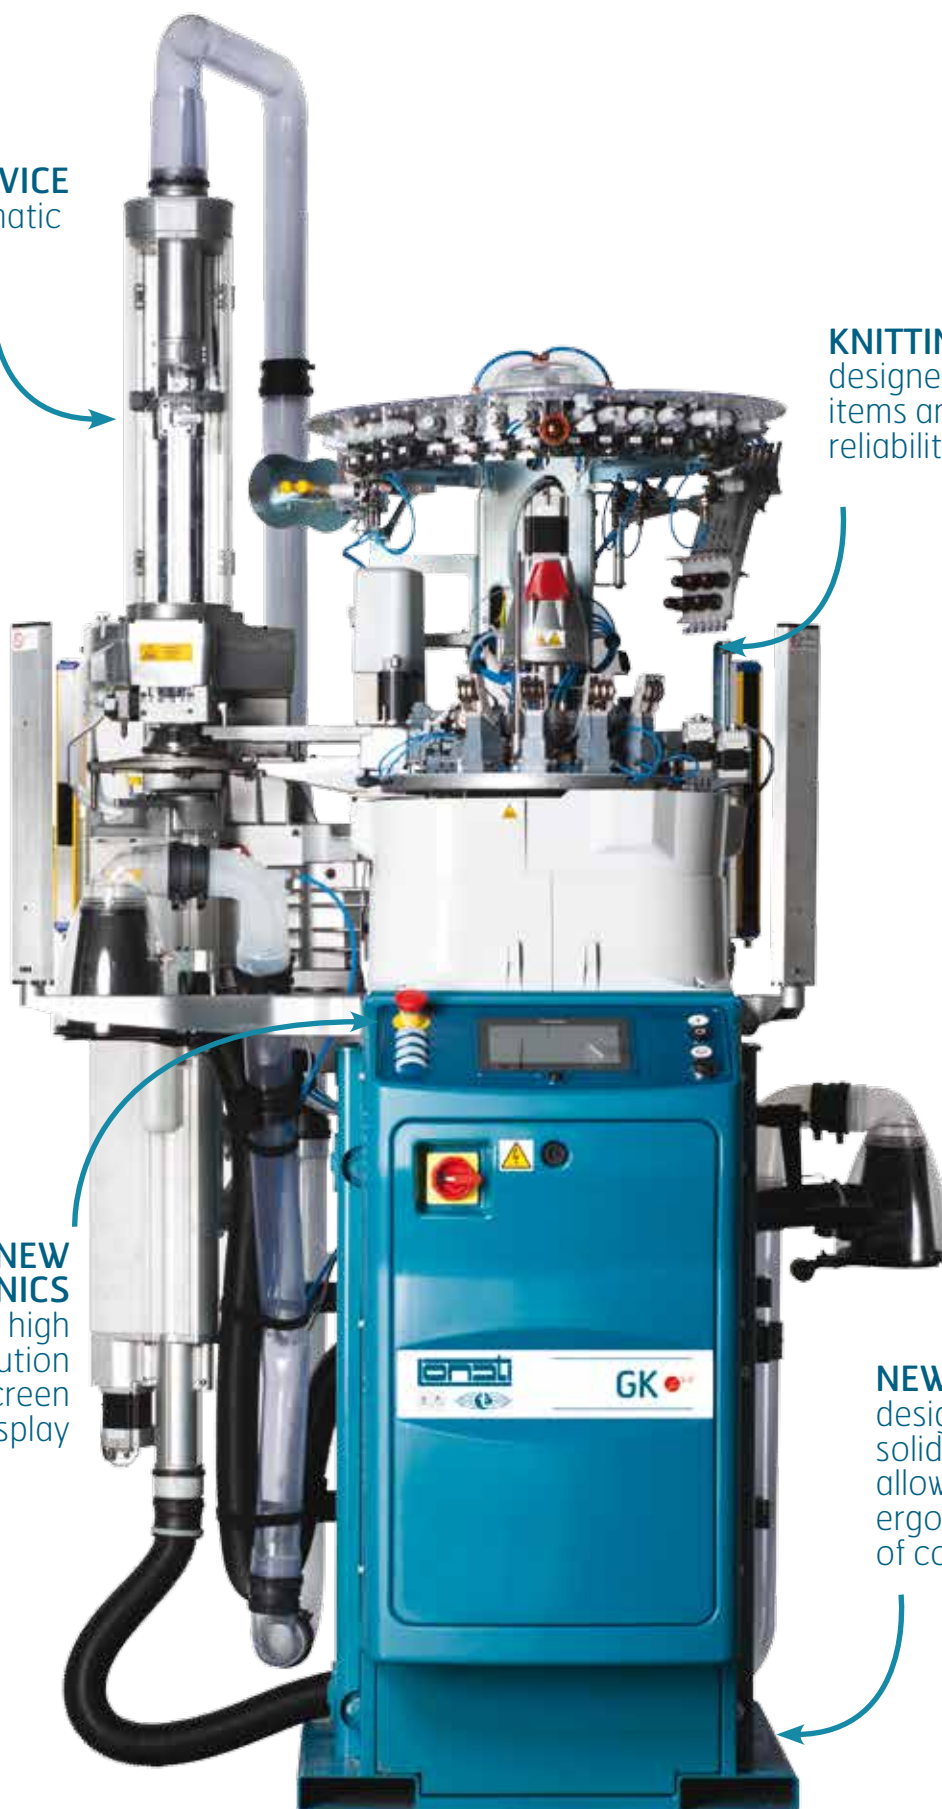

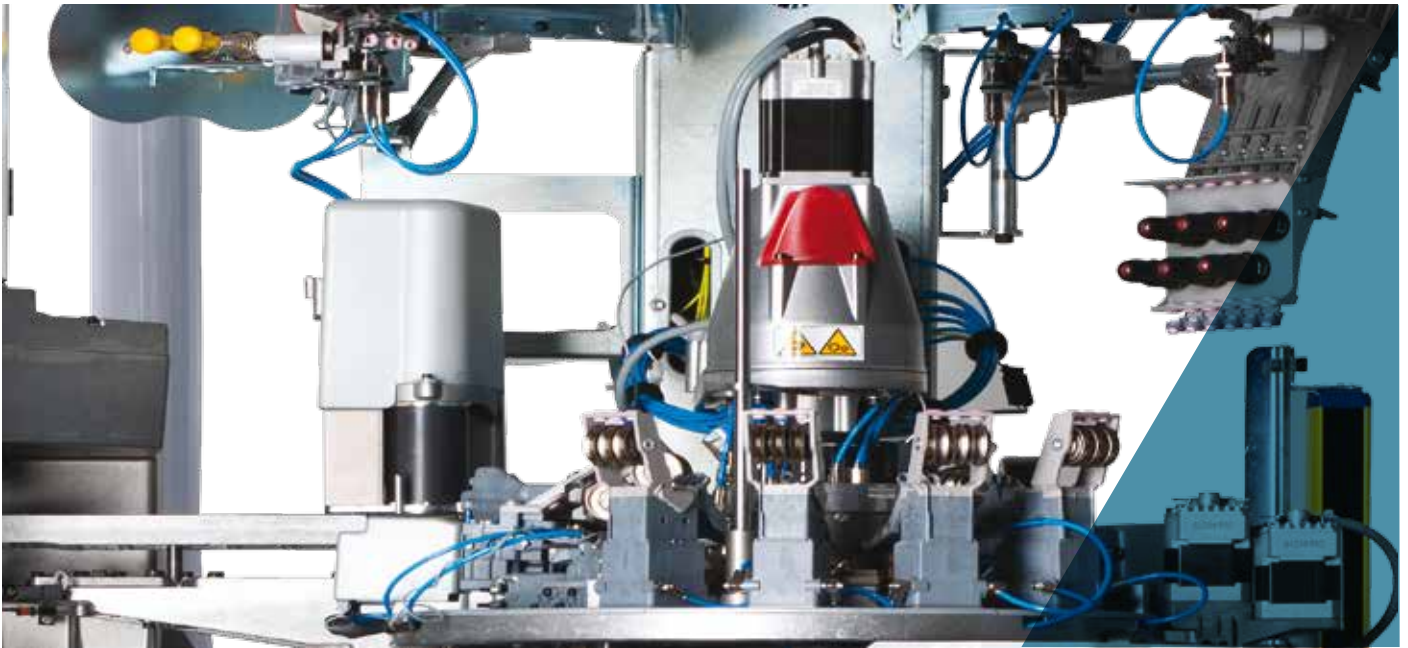

All images in this brochure are indicative and not binding.

SINGLE CYLINDER GK725H - GK625H - GK525H

Goal Series 2 feeds machines are designed to increase productivity still ensuring best quality. They are available in different diameters with different numbers of needles. Automatic linking with SBYS device, performing a “real linking” technique. Advantages are remarkable: superior quality sock finishing, more comfort and resistance compared to socks made using conventional systems. Latest generation electronics provides control and execution of all machine commands. Drawings and articles are created and managed by Digraph 3 Plus software package, which contains a full collection of styles the operator can combine in different ways to obtain the desired results.

- 5 colors pattern with 1 feeds, plain knit
- Reciprocated heel and toe in different sizes and 3D effects
- 28 yarn fingers
- Rising dial and finger plate with stepping motor
- 9 electronic actuators for needle selection
- Brushless coaxial main motor

DIMENSIONS



Length cm 116,8
Depth cm 103,7
Height cm 226

WEIGHT



Machine ca. 320 Kg
Yarn creel ca. 46 Kg

CERTIFICATION

SINGLE CYLINDER

GK725H - GK625H - GK525H

TECHNICAL FEATURES

MODEL	CYLINDER DIAMETER	GAUGE	NEEDLE THICKNESS
GK725H	3"1/2	7 1/2 to 20	0.85 - 0.70 - 0.60 mm
GK625H	3"3/4	from 9 to 20	0.85 - 0.70 - 0.60 mm
GK525H	4"	from 8 1/2 to 19	0.85 - 0.70 - 0.60 mm

Above data are indicative and not binding.

STANDARD DEVICES

- Stepper motor electric dial with adjustable height
- Stitch cam feed 1 and 2 different heights.
- High speed sinker cap
- High resolution touch screen display
- Yarn sliding sensors guard cleaning device
- Heel yarn recover device with four positions
- 14 color yarn fingers
- 2 stepper motor controlled adjustable suction valves
- 9 yarn fingers on first feed, 6 on second feed
- Yarn creel
- USB port
- Circular yarn cutter with mechanical stop
- 1 yarn finger on laid-in elastic feed

MAIN OPTIONAL DEVICES

- LGL Eco Power or Compact yarn storage feeder
- Dinema YoYo positive yarn feeders
- Elastic yarn positive feeders, for compression socks
- Dinema Plus elastane positive feeders
- Stitch cams on feeds 1 and 2 with 2 heights
- Motorized stitch cams
- Motorized sinkers cap for sinkers pressure
- Motorized sinkers cap for sinkers pressure and angular position
- Antitwist device
- Footlet device
- Inside-out sock ejection device
- Elastane extra pliers device
- Recover yarn device, 6 positions
- Yarn trimming circular cutter with adjustable speed
- Knitting device inspection lamp
- Ethernet board for connection to Dinema Nautilus
- data collector system
- Second elastic yarn finger on second feed
- Yarn sliding control sensors, Dinema ISPY
- Pneumatic yarn tensioner for covered elastane
- Suction fan

POSSIBLE KNITTING

The standard machine can perform the following knittings

- Mesh, tuck and float stitch, jacquard, 2 feeds
- 5 colors pattern plus ground color, mesh, tuck and float stitch, 1 feed
- With laid-in elastic: 5 colors pattern plus ground color, tuck and float stitch, 1 feed
- With laid-in elastic: 4 colors pattern plus ground color, mesh, tuck and float stitch, 1 feed
- Laid-in elastic on 2 feeds, that is 1 elastic course every 2 knitted courses
- With the second elastic yarn finger 4 colors pattern on course plus ground, tuck and float stitch, 1 feed
- With the second elastic yarn finger 3 colors pattern on course plus ground, mesh, tuck and float stitch, one feed

NUMBER OF COLORS

Number of colors

5 colors on course plus ground color, one feed

PERFORMANCES

	3" 1/2	3" 3/4	4" CYLINDERS
KNITTING FEATURES	Patterns or selections 300 rpm		
	Plain knit without pattern 350 rpm		
MAXIMUM SPEED	350 rpm		

Above data are indicative and not binding.

DISCLAIMER: maximum speed may vary depending on yarn, knitting, lubrication etc

GAUGE

Model	ø	GAUGE																											
		6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	12½	13	13½	14	14½	15	15½	16	16½	17	17½	18	18½	19	20	
GK525H	4"					108		116		128	136	144		156		168	176	180	188	192	200							240	
		Needle thickness 0.85 mm																											
		Needle thickness 0.70 mm												Needle thickness 0.60 mm															
GK625H	3"3/4						108	112	116	120	128	132	136	144		156	160	168		176	180	188	192	200			216	220	240
		Needle thickness 0.85 mm																											
		Needle thickness 0.70 mm												Needle thickness 0.60 mm															
GK725H	3"1/2			84	88	96	100		108	112	116	120	128	132		144		156		168			180		192	200			220
		Needle thickness 0.85 mm																											
		Needle thickness 0.70 mm																Needle thickness 0.60 mm											

Above data are indicative and not binding.

DISCLAIMER:

All features in the brochure are for information only and subject to change without any prior notice.

For a complete list of available options, please contact Lonati sales network.
The Company accepts no liability for improper use of machinery.



LONATI SPA

Via Francesco Lonati, 3 | 25124 Brescia (Italy)
Tel. +39 030 23901 | Fax +39 030 2310024
C.F.: 01469680175 | P.iva: 02096730961
info@lonati.com - www.lonati.com