


WOMEN'S WOMEN'S SINGLE CYLINDER LB04M7

WOMEN'S SINGLE CYLINDER

LB04M7

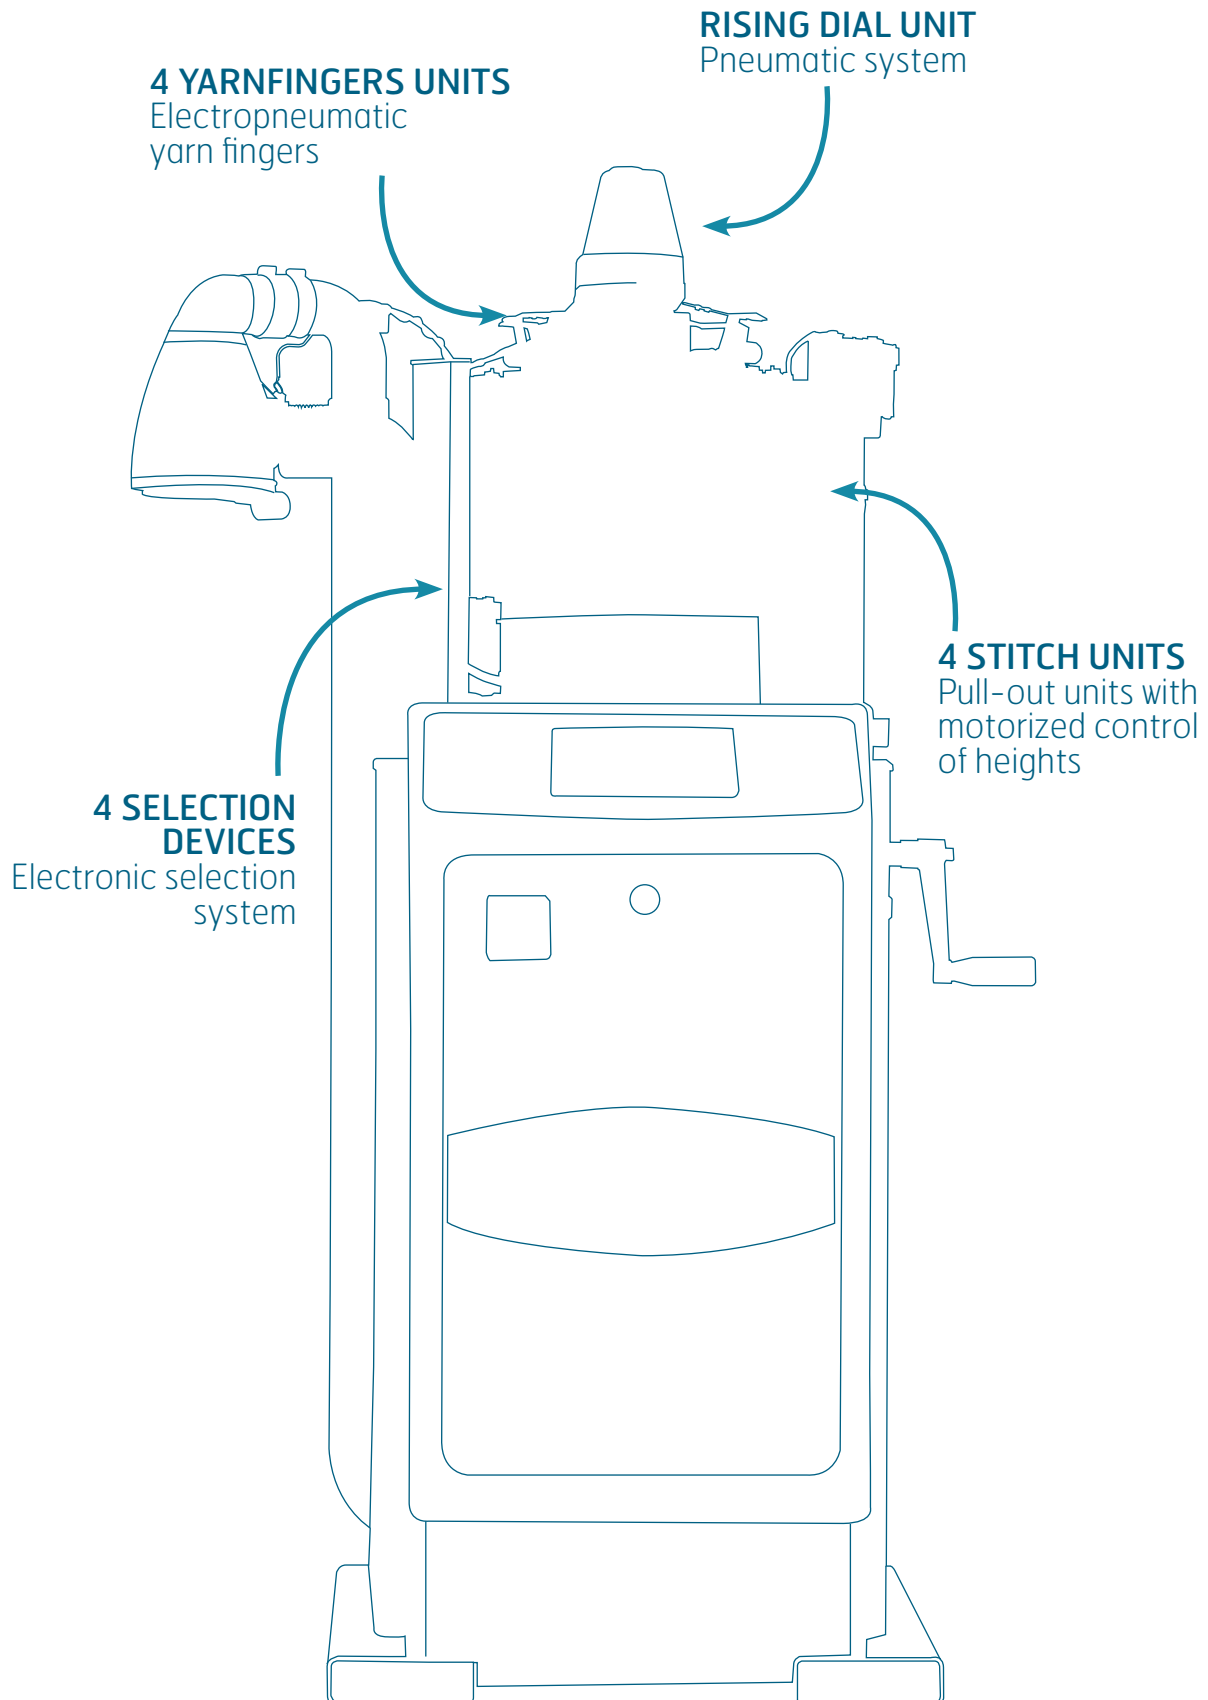

WOMEN'S SINGLE CYLINDER LB04M7

Electropneumatic single cylinder 4 feeds machine with 1 electronic needle-by-needle selection unit on each feed for the manufacture of pantyhose in jacquard, baguette and bikini patterns. 5 yarn fingers with dual pneumatic control on each feed, plus 1 plating motorized yarn finger for angular movement and 2 pneumatic controls for height and depth. Motorized stitch cams for ducking. Single or double dial jacks. Electronic device to maintain the size at any temperature of the machine.

- 4 feeds single cylinder machine
- 6 pliers suction unit
- 24 yarnfingers
- Motorized sinkers cap, 1 motor
- 4 motorized stitch cams
- 1 electronic selection unit on each feed

DIMENSIONS



Length 60 cm + yarn creel cm 145
Depth 60 cm + yarn creel cm 145
Height 136 cm + yarn creel 265 cm

WEIGHT



Machine 230 kg
Yarn creel 70 kg

CERTIFICATION



Green
Label

WOMEN'S SINGLE CYLINDER

LB04M7

TECHNICAL FEATURES

MODEL	CYLINDER DIAMETER	GAUGE	NEEDLE THICKNESS
LB04M7 (Needle latch 7 mm)	4"	32	0.34 mm

Above data are indicative and not binding.

STANDARD DEVICES

- 26 or 40 reels yarn creel
- Sock ejection hood
- Yarn waste filter
- Stepper motor controlled suction valve
- Rotary or fixed antitwist device
- 4 fixed stitch unit with motorized movement by heights
- 6 pliers suction unit (plates, hooks and cut-pick)
- 4 yarn sliding sensors
- Motorized radial plating on first yarnfinger
- Extra latch-opener for open-work

OPTIONAL DEVICES

- DREAM or DREAM ONE device for stretching socks in ejection
- 1,1 or 2,2 Kw suction fan
- Production data collecting system: DCN ethernet
- Dinema YoYo yarn feeder, 12 max
- Dinema Plus medical or bare elastomer yarn feeders, 4 max
- Yarn sensors, 24 max
- Motorized sinkers cap, 2 motors
- Motorized rising dial unit
- Knit-in device kit

ALLOWED YARNS

The machine is designed to be used with the following yarns:

- Nylon;
- Filanca;
- Elastomers (bare, single or double cover);
- Stretch, for transparent items;

POSSIBLE KNITTINGS

The standard machine can perform the following knittings

- Plain knit
- 1:1, 3:1, 5:1, 7:1, 1:3 fixed mesh, micromech and diagonal mesh
- Different selections for vertical cutting bands
- Several 1:1, 2:2 (cut boss) pattern, bikini pattern, pattern heel, pushup etc.
- Supp-hose on 2 or 4 feeds
- Plain knit plating on 2 or 4 feeds
- Supp-hose on 2 or 4 feeds

NUMBER OF COLORS

Number of colors

- Working feeds 1-2-3-4: one color each course

PERFORMANCES

	4" CYLINDER DIAMETER
GAUGE	550 rpm with pattern, stitch cams at 55°
KNITTING FEATURES	650 rpm plain knit, no pattern, stitch cams at 55°
	750 rpm plain knit, no pattern, stitch cams at 48°
	850 rpm plain knit, no pattern, stitch cams at 40°
MAXIMUM SPEED	850 RPM

Above data are indicative and not binding.

DISCLAIMER:

Speed may need to be adjusted according to the inclination of the stitch cams, to the mechanical parts in use and to the yarn.
N.B. All data in the brochure are for information only and subject to change without any prior notice from Lonati SpA.

ALLOWED PERFORMANCES

CHART OF MAXIMUM ALLOWED SPEED IN PLAIN KNIT IN RELATION TO THE INCLINATION TO THE STITCH CAMS	
Stitch cam inclination	Maximum allowed speed in plain knit
40°	850
48°	750
55°	600

NUMBER OF POSSIBLE COLORS ON EACH COURSE ACCORDING TO THE NUMBER OF WORKING FEEDS	
Working feeds	Number of colors
1° - 2° - 3° - 4°	1 each course

CILINDRI DISPONIBILI	
GG75-0,34	320 - 336 - 352 - 368 - 384 - 386 - 400 - 402
GG70-0,41	288 - 320 - 336 - 352
GG54-0,50	176 - 208 - 240 - 256 - 288 - 320

Above data are indicative and not binding.

DISCLAIMER:

All data related to maximum allowed mechanical speed may require to be reduced (to be adjusted according to functional tests on the machine) when using specific particular yarns and/or knitting features.



LONATI SPA

Via Francesco Lonati, 3 | 25124 Brescia (Italy)
Tel. +39 030 23901 | Fax +39 030 2310024
C.F.: 01469680175 | P.iva: 02096730961
info@lonati.com - www.lonati.com